

Pump Performance Datasheet

Customer :	Quote number :
Customer reference :	Size : LVI 300-330
Item number : Default	Stages : 1
Service :	Based on curve number : LVI 300-300-330-4-50
Quantity : 1	Date last saved : 16 Nov 2023 6:30 PM


Operating Conditions	Liquid
Flow, rated : 1,005.0 m3/h	Liquid type : Water
Head, rated (requested) : 28.78 m	Additional liquid description :
Head, rated (actual) : 28.78 m	Solids diameter, max : 0.0 mm
Suction pressure, rated / max : 0.00 / 0.00 bar.g	Solids concentration, by volume : 0.00 %
NPSH available : Ample	Temperature : 20.00 deg C
Site Supply Frequency : 50 Hz	Fluid density : 0.999 / 0.999 kg/dm3
	Viscosity : 1.00 cSt
	Vapor pressure, rated : 0.00 bar.a

Performance	Material
Speed criteria : Synchronous	Material selected : Standard
Speed : 1450 rpm	
Impeller dia. : 336 mm	
Impeller diameter, maximum : 336 mm	
Impeller diameter, minimum : 260 mm	
Efficiency : 82.12 %	
NPSH required / margin required : 5.56 / 0.00 m	
nq (imp. eye flow) / S (imp. eye flow) : 62 / 212 Metric units	
MCSF : -	
Head max. : 38.37 m	
Head rise to shutoff : 33.34 %	
Flow, best eff. point : 1,005.0 m3/h	
Flow ratio, rated / BEP : 100.00 %	
Diameter ratio (rated / max) : 100.00 %	
Head ratio (rated dia / max dia) : 100.00 %	
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010] : 1.00 / 1.00 / 1.00 / 1.00	
Selection status : Acceptable	

Pressure Data	
Maximum working pressure	: 3.76 bar.g
Maximum allowable working pressure	: 16.00 bar.g
Maximum allowable suction pressure	: 2.50 bar.g
Hydrostatic test pressure	: 24.00 bar.g


Driver & Power Data (@Max density)	
Driver sizing specification	: Maximum power
Margin over specification	: 0.00 %
Service factor	: 1.00
Power, hydraulic	: 78.66 kW
Power, rated	: 95.80 kW
Power, maximum	: 105 kW
Motor rating	: 112 kW / 150 hp

Performance based on test acceptance - ISO 9906:2012 3B. Performances are subject to periodic changes due to continuous improvements.

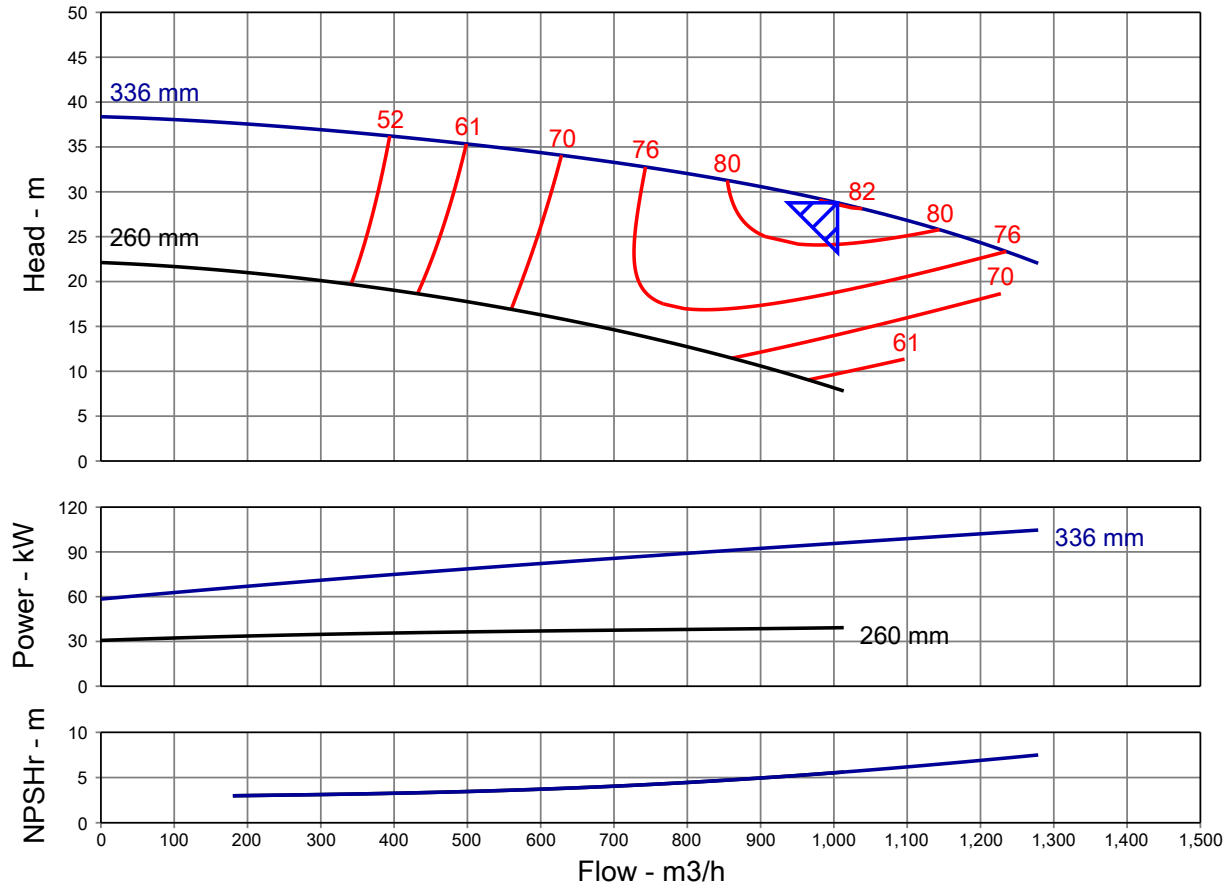

Pump Performance Curve


Performance based on test acceptance - ISO 9906:2012 3B. Performances are subject to periodic changes due to continuous improvements.

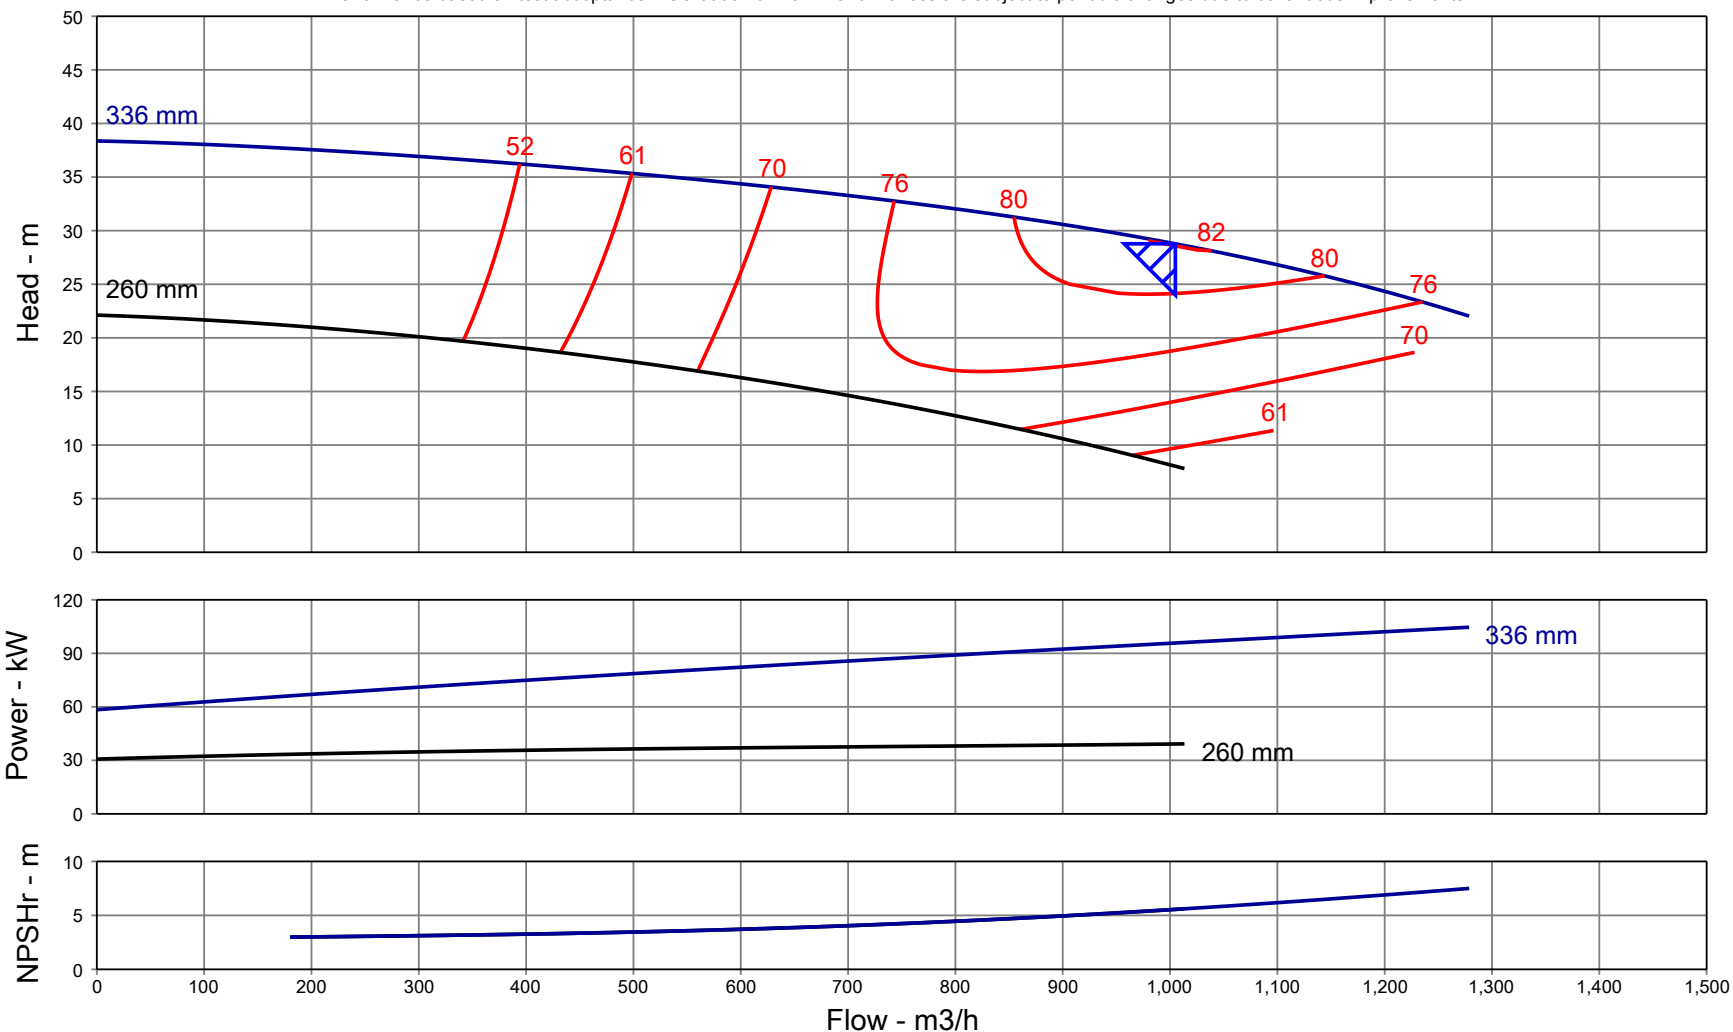

Customer	:	Size	: LVI 300-330	Flow, rated	: 1,005.0 m ³ /h
Customer reference	:	Stages	: 1	Head, rated	: 28.78 m
Item number	: Default	Speed	: 1450 rpm	Fluid density	: 0.999 / 0.999 kg/dm ³
Service	:	Based on curve number	: LVI 300-300-330-4-50	Viscosity	: 1.00 cSt
Quantity	: 1	Efficiency	: 82.12 %	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00
Quote number	:	Power, rated	: 95.80 kW		
Date last saved	: 16 Nov 2023 6:30 PM	NPSH required	: 5.56 m		

Multi-Speed Performance Curve

Performance based on test acceptance - ISO 9906:2012 3B. Performances are subject to periodic changes due to continuous improvements.

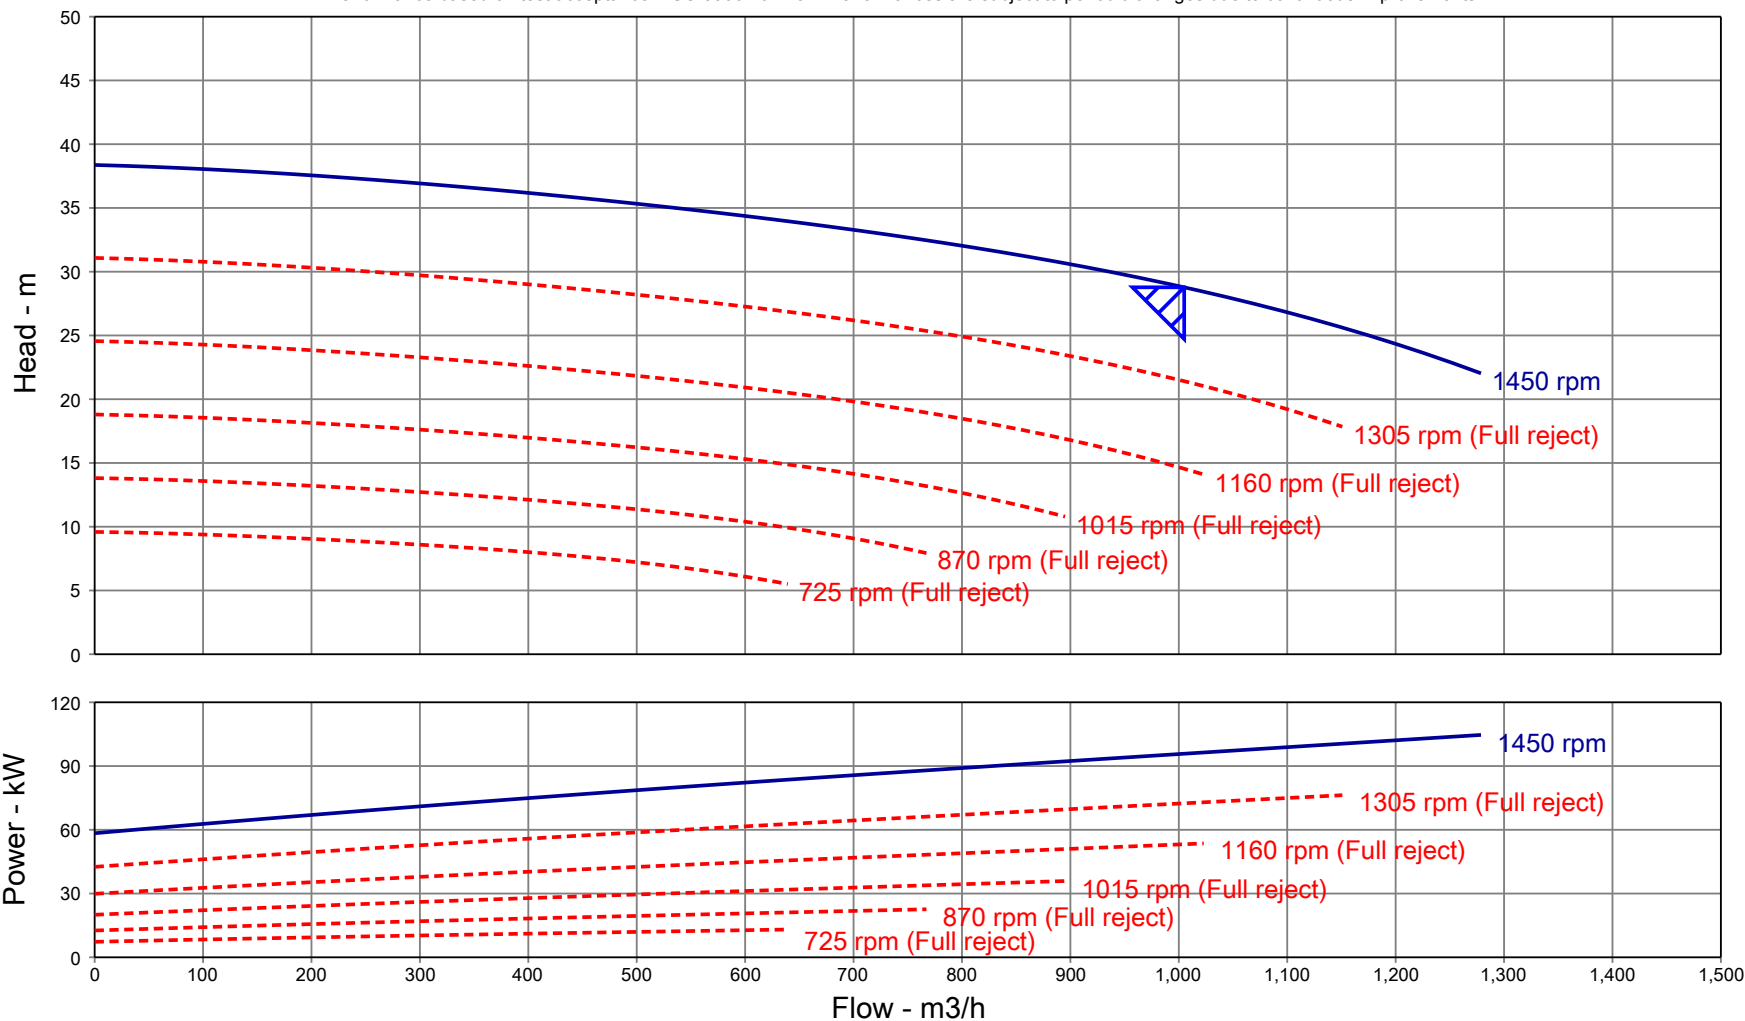

Customer :	Stages : 1	Nominal speed : 1450 rpm
Customer reference :	Based on curve number : LVI 300-300-330-4-50	Flow, rated : 1,005.0 m ³ /h
Item number : Default	Efficiency : 82.12 %	Head, rated : 28.78 m
Service :	Power, rated : 95.80 kW	Speed : 1450 rpm
Quantity : 1	NPSH required : 5.56 m	Impeller dia. : 336 mm
Quote number :	Site Supply Frequency : 50 Hz	Fluid density : 0.999 / 0.999 kg/dm ³
Date last saved : 16 Nov 2023 6:30 PM		Viscosity : 1.00 cSt
Size : LVI 300-330		Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010] : 1.00 / 1.00 / 1.00 / 1.00

Life Cycle Cost Datasheet

Customer :	Quantity : 1	Size : LVI 300-330
Customer reference :	Quote number :	Stages : 1
Item number : Default	Date last saved : 16 Nov 2023 6:30 PM	Speed : 1450
Service :		

Load Profiles and Energy Costs

Expected pump life: 20 years	Load Profile #1	Load Profile #2	Load Profile #3	Load Profile #4	Load Profile #5	Total
Flow: (m3/h)	7.69	-	-	-	-	-
Operation: (hours per year)	8,760	-	-	-	-	8,760
Energy cost, present value (\$ per kWh)	0.1	-	-	-	-	-
Speed (rpm)	1450	-	-	-	-	-
Head (m)	38.35	-	-	-	-	-
Efficiency (%)	1.37	-	-	-	-	-
Power, rated (kW)	58.73	-	-	-	-	-
Motor efficiency (%)	100.00	-	-	-	-	-
Drive/gear efficiency (%)	100.00	-	-	-	-	-
System curve	-	-	-	-	-	-
Energy, total (kWh)	10,288,945.5	-	-	-	-	10,288,945.5
Energy cost, per year	\$ 51,444.73	-	-	-	-	\$ 51,444.73
Energy cost, total present value	\$ 771,587.50	-	-	-	-	\$ 771,587.50

Life Cycle Cost Calculation

Additional Annual Costs	Additional One-time Costs, Year 0	Interest and Inflation Rates
Routine maintenance cost : 0.00	Initial investment cost : 0.00	Interest rate, % : 6.00
Repair cost : 0.00	Installation and commissioning cost : 0.00	Inflation rate, % : 3.00
Operating cost : 0.00	Other one-time costs, year 0 : 0.00	Total Net Present Value Costs
Downtime cost : 0.00	Additional One-time Costs, Year 20	Total energy cost : \$ 771,587.50
Environmental cost : 0.00	Decommissioning cost : 0.00	Total additional annual cost : \$ 0.00
Other annual costs : 0.00	Other one-time costs, year 20 : 0.00	Total additional one-time cost : \$ 0.00
Total, present value : \$ 0.00	Total, present value : \$ 0.00	Total life cycle cost : \$ 771,587.50

Pump Performance - Additional Data

Customer :	Quote number :
Customer reference :	Size : LVI 300-330
Item number : Default	Stages : 1
Service :	Speed : 1450 rpm
Quantity : 1	Intellicode :
	Date last saved : 16 Nov 2023 6:30 PM

Performance Data	Stage, Speed and Solids Limits
Head, maximum diameter, rated flow : 28.78 m	Stages, maximum : 1
Head, minimum diameter, rated flow : 8.03 m	Stages, minimum : 1
Head max. : 38.37 m	Pump speed limit, maximum : 1750 rpm
Efficiency adjustment factor, total : 1.00	Pump speed limit, minimum : 1350 rpm
Power adjustment, total : 0.00 kW	Curve speed limit, maximum : 1750 rpm
Head adjustment factor, total : 1.00	Curve speed limit, minimum : 1350 rpm
Flow adjustment factor, total : 1.00	Variable speed limit, maximum : -
Flow adjustment factor, efficiency only (shift BEP) : 1.00	Variable speed limit, minimum : -
Flow adjustment factor, end-of-curve only, total : 1.00	Solids size limit : 0.0 mm
MCSF adjustment factor : 1.00	
NPSHR adjustment factor, total : 1.00	
NPSHR slope correction factor : 1.00	
User applied performance adjustment comments :	
NPSH margin dictated by pump supplier : 0.00 m	
NPSH margin dictated by user : 0.00 m	
NPSH margin used (added to 'required' values) : 0.00 m	

Mechanical Limits	Typical Driver Data
Torque, rated power, rated speed : 66.07 kW/1000 rpm	Driver speed, full load : 1450 rpm
Torque, maximum power, rated speed : 72.16 kW/1000 rpm	Driver speed, rated load : 1450 rpm
Torque, driver power, full load speed : 77.14 kW/1000 rpm	Driver efficiency, 100% load : N/A
Torque, driver power, rated speed : 77.14 kW/1000 rpm	Driver efficiency, 75% load : N/A
Torque, pump shaft limit : -	Driver efficiency, 50% load : N/A
Radial load, worst case : -	
Radial load limit : -	
Impeller peripheral speed, rated : -	
Impeller peripheral speed limit : -	

Various Performance Data	Flow (m3/h)	Head (m)	Efficiency (%)	NPSHr (m)	Power (kW)
Shutoff, rated diameter	0.00	38.37	-	-	58.38
Shutoff, maximum diameter	0.00	38.37	-	-	58.38
MCSF	-	-	-	-	-
Rated flow, minimum diameter	1,005.0	8.03	56.01	-	39.18
Rated flow, maximum diameter	1,005.0	28.78	82.12	-	95.80
BEP flow, rated diameter	1,005.0	28.78	82.12	5.56	95.80
120% rated flow, rated diameter	1,206.0	24.18	77.54	6.94	102
End of curve, rated diameter	1,278.7	22.03	73.23	7.50	105
End of curve, minimum diameter	1,013.4	7.81	54.84	5.61	39.23
End of curve, maximum diameter	1,278.7	22.03	73.23	7.50	105
Maximum value, rated diameter	-	38.37	82.12	-	105
Maximum value, maximum diameter	-	-	82.12	-	105

System differential pressure	@ Density, rated	@ Density, max
Differential pressure, rated flow, rated diameter (bar)	2.82	2.82
Differential pressure, shutoff, rated diameter (bar)	3.76	3.76
Differential pressure, shutoff, maximum diameter (bar)	3.76	3.76

Discharge pressure	@ Suction pressure, rated	@ Suction pressure, max	@ Suction pressure, rated	@ Suction pressure, max
Discharge pressure, rated flow, rated diameter (bar.g)	2.82	2.82	2.82	2.82
Discharge pressure, shutoff, rated diameter (bar.g)	3.76	3.76	3.76	3.76
Discharge pressure, shutoff, maximum diameter (bar.g)	3.76	3.76	3.76	3.76

Ratios	
Maximum flow / rated flow, rated diameter : 127.24 %	Head rated diameter / head minimum diameter, rated flow : 358.49 %



Pump Performance - Additional Data

Construction

Vertical In-Line Pump Classifications	: Standard	
---------------------------------------	------------	--